
GOT5152T-832

15" XGA TFT Fanless Touch Panel Computer with Intel® Atom™ Processor D2550





- 1. Power switch (ATX)
- 2. Terminal block for DC power input or 3. Screw conn. w/ AC power adapter
- 4 USB 2 0 x 2
- 5. COM 3 (RS-232)
- 6. VGA
- 7. COM 1 (RS-232/422/485)
- 8. COM 2 (RS-232)
- 9. Ethernet x 2
- 10. USB 2.0 x 2
- 11. Audio (Line-out)

Features

- 15" XGA TFT LCD display with LED backlight
- Fanless cooling system with Intel® Atom™ processor D2550 2 cores @1.86 GHz
- Ultra slim design: thickness 54.6 mm
- Super light weight: 3.2 kg
- Easy for expansion: PCle Mini Card
- Supports optional panel mount, wall mount, VESA arm and desktop stand
- Supports RFID (optional)
- Over-current protection fuse
- Plastic and IP65-rated front bezel





▲ CompactFlash[™] slot with protective cover

















Introduction

Axiomtek's GOT5152-832 offers the latest fanless technology using Intel® dual core D2550 1.86GHz CPU. Running Windows or Linux, this system provides great performance for many commercial and industrial applications. This slim design incorporates a 15" 400 nits LCD display providing a bright XGA (1024 x 768) touch screen. Wireless communications is supported with a built-in antenna within the bezel, ready for your choice of optional PCle Mini-card WiFi cards. There are two choices for powering the unit, Class B that includes an external AC to DC power brick with screw-on power connector, or Class A with no power brick, providing a Phoenix style DC connector (10VDC – 30VDC). Using an all industrial-grade IP-65 rated design, weighing 7 to 11lbs (depending on configuration), this computer provides an attractive cost, low power, high performance, reliable quality, slim size and low weight, all new for more demanding applications.

Super slim & ultra light design

The 6075152T-832 is a super slim touch panel computer for space-limited environment with its thickness of 54.6mm and weight of 3.2 kg only, which make it installed everywhere.

Built-in internal WLAN antenna

The GOT5152T-832 provides a PCIe Mini Card slot and a built-in WLAN antenna for wireless network connections. By simply plugging in the wireless LAN card, customers can use the GOT5152T-832 in a wireless LAN/GPRS/GSM/4G environments.

Excellent thermal solution: aluminum back chassis

With Axiomtek's patent for plastic plus aluminum mechanism design, the GOT5152T-832 can dissipate the heat easily and keep the system operation stable.

Specifications

Front Bezel	IP65, NEMA 4 rugged	IP65, NEMA 4 rugged protection, plastic front bezel		
LCD Panel	Display Type	15" XGA TFT LCD with LED		
		backlight		
	Brightness (cd/m²)	400 nits		
	Resolution	1024 x 768		
	Viewing Angel (H/V)	160°/140°		
Main System	CPU	Intel® Atom™ processor D2550		
		2 cores @1.86 GHz		
	Chipset	Intel® NM10		
	System	1 x 204-pin DDR3 SO-DIMM max.		
	Memory	up to 4 GB		
	BIOS	AMI UEFI BIOS		
	Storage	1 x 2.5" SATA HDD		
		1 x CompactFlash™		
	Watchdog Timer	255 levels, 0~255 sec.		
	Onboard Graphics	Integrated in Intel® GFX		

^{*} All specifications and photos are subject to change without notice.

Specifications

I/O Connector	2 x RS-232 (COM 2/3)			
	1 x RS-232/422/485 (COM 1)			
	1 x VGA			
	1 x Audio (Line-out)			
	4 x USB 2.0			
	2 x 10/100/1000Mbps Ethernet			
Expansion Interface	1 x PCle Mini Card slot			
Touchscreen	Resistive type			
Power Input	1. DC version: 10~30VDC with over-current protection fuse 2. AC version: 100-240V AC-DC 60W power adapter			
Dimensions	387.9 mm (15.27") (W) x 54.6 mm (2.14") (D)			
	x 307.7 mm (12.11") (H)			
Packing Dimensions	510 mm (20.08") (W) x 105 mm (4.13") (D)			
	x 385 mm (15.16") (H)			
Weight (net/gross)	3.2 kg (7.05 lb)/5.1 kg (11.24 lb)			
Environment	Operating temperature:			
	0° ~ +50°C (+32°F ~ +122°F) (with W.T. DRAM/HDD in airflow condition)			
	0° ~ +45°C (+32°F ~ +113°F) (with W.T. DRAM/HDD)			
	Storage Temperature:			
	0° ~ +50°C (+32°F~ +122°F) (in airflow condition)			
	Relative humidity: 20% ~ 90% @ 40°C; non-condensing			
	CompactFlash™			
Certificate	UL60950-1, CE			

^{*} Specification and certifications are based on options and may vary.

Ordering Information

G0T5152T-832	15" XGA Intel® Atom™ D2550 fanless touch panel computer with terminal block connector	
G0T5152T-832-J	15" XGA Intel® Atom™ D2550 fanless touch panel computer with screw type connector & AC-DC 60W power adapter, EMI class B	

^{*} Specification and certifications are based on options and may vary.

Optional EOS Installation

WES		
WES 7		

Optional OS Installation

Windows® XP Windows® 7



Overview



Industrial Panel Computers & Monitors



Heavy-duty Fanless Touch Panel Computers



Digital Signage Solutions




Healthcare & Medical Solutions




Open Frame Panel Computers

Accessories

Dimensions



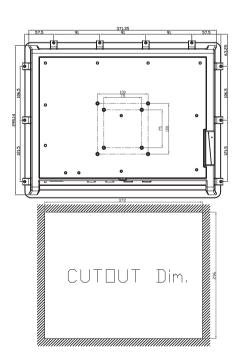

^{**} W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

^{*} All specifications and photos are subject to change without notice.